


Compact Design Red-Light Reflex Light Barrier

with Gloss Suppression Type JP53

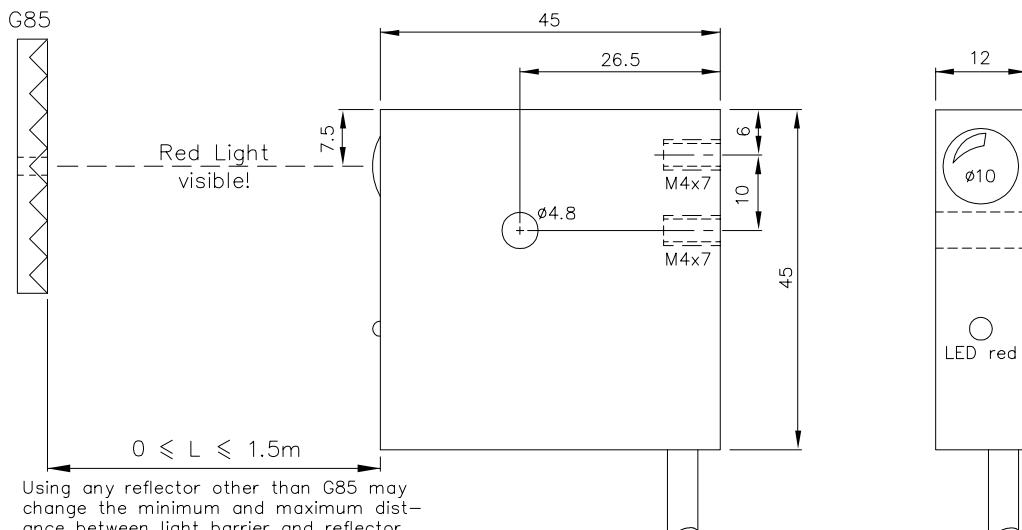

Connection diagram of version: 24VDC, e4, k4

Scale 1:1

JP53

Order no.:

1117

Technical characteristics:

Features:

Housing	Luran S	Output	npn, 60mA, s.c.-prot.
Weight	approx. 75g		antivalent, e5
Protection mode	IP 64	pnp, 60mA, s.c.-prot., e2	
Connection	4 wire cable, 2m	npn, 60mA, s.c.-prot., e3	bright- or darkswitching (only e2; e3)
Supply	24VDC/40mA without load	"q": ~0,5ms/Switch transition	"q": <500/s
Output	pnp, 60mA, s.c.-prot.		
	antivalent, e4		
Signal mode	bright/dark switching		
Transmitter light	LED 650nm, visible		
Steady light resistance	>80kLx		
Interference suppression	Forced synchronization		
Light beam diameter	approx. 75mm/1.5m		
Access time	~12ms/Switch transition		
Switching rate	approx. 40/s		
Switch indicator	LED red		
Ambient temperatur	-25...+60°C		

Signal mode
Access time
Switching rate

Antivalent, e4
bright- or darkswitching (only e2; e3)
>500/s

1117 DE
E 1117
1
01.01.89 cm
(18.02.05 m)
(13.04.05 m)
tb
(08.01.02 tb)
DE

Accessories:

Reflector